



LED Downlight ND204S - ND207S 3CCT

Features

- 9W / 11W / 15W / 20W / 22W LED Downlight
- Selectable CCT via dip-switch
- Inventory cost saving
- Recessed round, uniform distribution
- Comfort glare-free diffuser
- Ideal replacement up to 2x26W compact fluo. downlight
- Good color rendition, Ra ≥ 80

Materials / Finish

- Body: Die cast aluminium with white finish
- Trim: Die cast aluminium, UV protected
- Diffuser: Frosted PC, UV protected

Installation / Mounting

- Metal box with Ø20mm knockout facilitates conduit mounting
- Quick installation with mounting bracket
- Suitable for recessed mounting
- Integral gear unit allows quick and easy installation
- Cut out dimensions Ø110mm / Ø140mm / Ø190mm


Standards

- Designed and manufactured to comply with international standard EN60598
- Class I Electrical
- IP 20




- Selectable CCT
- Inventory cost saving

Dip-switch

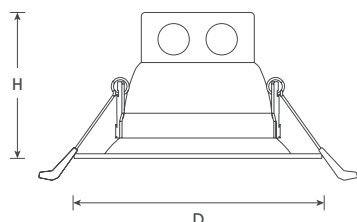

(Unit : mm)	(D)	(H)	Cut Out Dimensions
ND204S	Ø140 x	83	Ø110
ND205S	Ø180 x	85	Ø140
ND207S	Ø220 x	85	Ø190



Model	Voltage	Luminaire Wattage	Color Temp	Beam Angle	Luminaire Lumen	
ND204S-9W/8XX/3CCT	220 - 240V	9W	3000K - 4000K - 6500K	90°	740lm	F
ND204S-11W/8XX/3CCT	220 - 240V	11W	3000K - 4000K - 6500K	90°	875lm	F
ND205S-15W/8XX/3CCT	220 - 240V	15W	3000K - 4000K - 6500K	90°	1165lm	F
ND205S-20W/8XX/3CCT	220 - 240V	20W	3000K - 4000K - 6500K	90°	1510lm	F
ND207S-22W/8XX/3CCT	220 - 240V	22W	3000K - 4000K - 6500K	90°	1680lm	F

