



LED Highbay NH141E - NH144E

Features

- 50W / 100W / 150W / 200W LED Linear Highbay
- Uniformity distribution in high ceiling application
- Good color rendition, Ra ≥80

Materials / Finish

- Body: Die cast aluminium and external aluminium profile
- Lens: PC
- Chips: Philips Lumileds 3030
- Driver: Meanwell / Sosen
- End cap: Choice of black and red color

Installation / Mounting

- Pendant mount by stainless steel wire Ø1.2 x 300mm L / 1000mm L / 2000mm L or fixed installation by bracket 120mm height
- Easy assembly by screw fixation

Standards

- Designed and manufactured to comply international standard EN60598
- Class I Electrical
- IP 65





Accessories



Bracket




Chain

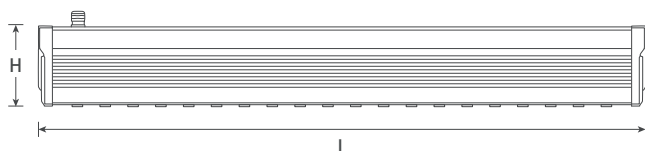

(Unit : mm) (L) (W) (H)

NH141E	278	x 135	x 90
NH142E	529	x 135	x 90
NH143E	780	x 135	x 90
NH144E	1131	x 135	x 90



Model	Voltage	Luminaire Wattage	Color Temp	Beam Angle	Luminaire Lumen	
NH141E-50W/830	100 - 277V	50W	3000K	30° / 60° / 90° / 80° x 150° / 30° x 70° / 60° x 90°	5465lm	E
NH141E-50W/840	100 - 277V	50W	4000K	30° / 60° / 90° / 80° x 150° / 30° x 70° / 60° x 90°	5700lm	E
NH141E-50W/865	100 - 277V	50W	6500K	30° / 60° / 90° / 80° x 150° / 30° x 70° / 60° x 90°	5940lm	D
NH142E-100W/830	100 - 277V	100W	3000K	30° / 60° / 90° / 80° x 150° / 30° x 70° / 60° x 90°	10925lm	E
NH142E-100W/840	100 - 277V	100W	4000K	30° / 60° / 90° / 80° x 150° / 30° x 70° / 60° x 90°	11400lm	E
NH142E-100W/865	100 - 277V	100W	6500K	30° / 60° / 90° / 80° x 150° / 30° x 70° / 60° x 90°	11875lm	D
NH143E-150W/830	100 - 277V	150W	3000K	30° / 60° / 90° / 80° x 150° / 30° x 70° / 60° x 90°	16390lm	E
NH143E-150W/840	100 - 277V	150W	4000K	30° / 60° / 90° / 80° x 150° / 30° x 70° / 60° x 90°	17100lm	E
NH143E-150W/865	100 - 277V	150W	6500K	30° / 60° / 90° / 80° x 150° / 30° x 70° / 60° x 90°	17815lm	D
NH144E-200W/830	100 - 277V	200W	3000K	30° / 60° / 90° / 80° x 150° / 30° x 70° / 60° x 90°	21850lm	E
NH144E-200W/840	100 - 277V	200W	4000K	30° / 60° / 90° / 80° x 150° / 30° x 70° / 60° x 90°	22800lm	E
NH144E-200W/865	100 - 277V	200W	6500K	30° / 60° / 90° / 80° x 150° / 30° x 70° / 60° x 90°	23750lm	D