



Model	Wattage	Voltage	Color	Color Temp	CRI	Lumen	Angle	Length	Type	Efficacy	Power factor
LED F9T8/830/G/600	9W	220-240V	Warm White	3000K	≥80	780lm	280°	600mm	Type A	87lm/W	0.85
LED F9T8/840/G/600	9W	220-240V	Neutral White	4000K	≥80	840lm	280°	600mm	Type A	93lm/W	0.85
LED F9T8/865/G/600	9W	220-240V	Daylight	6500K	≥80	900lm	280°	600mm	Type A	100lm/W	0.85
LED F10T8/830/G/600	10W	220-240V	Warm White	3000K	≥80	870lm	280°	600mm	Type A	87lm/W	0.85
LED F10T8/840/G/600	10W	220-240V	Neutral White	4000K	≥80	930lm	280°	600mm	Type A	93lm/W	0.85
LED F10T8/865/G/600	10W	220-240V	Daylight	6500K	≥80	1000lm	280°	600mm	Type A	100lm/W	0.85
LED F14T8/830/G/900	14W	220-240V	Warm White	3000K	≥80	1220lm	280°	900mm	Type A	87lm/W	0.85
LED F14T8/840/G/900	14W	220-240V	Neutral White	4000K	≥80	1310lm	280°	900mm	Type A	94lm/W	0.85
LED F14T8/865/G/900	14W	220-240V	Daylight	6500K	≥80	1400lm	280°	900mm	Type A	100lm/W	0.85
LED F18T8/830/G/1200	18W	220-240V	Warm White	3000K	≥80	1570lm	280°	1200mm	Type A	87lm/W	0.9
LED F18T8/840/G/1200	18W	220-240V	Neutral White	4000K	≥80	1670lm	280°	1200mm	Type A	93lm/W	0.9
LED F18T8/865/G/1200	18W	220-240V	Daylight	6500K	≥80	1800lm	280°	1200mm	Type A	100lm/W	0.9
LED F20T8/830/G/1200	20W	220-240V	Warm White	3000K	≥80	1740lm	280°	1200mm	Type A	87lm/W	0.9
LED F20T8/840/G/1200	20W	220-240V	Neutral White	4000K	≥80	1860lm	280°	1200mm	Type A	93lm/W	0.9
LED F20T8/865/G/1200	20W	220-240V	Daylight	6500K	≥80	2000lm	280°	1200mm	Type A	100lm/W	0.9
LED F22T8/830/G/1200	22W	220-240V	Warm White	3000K	≥80	1910lm	280°	1200mm	Type A	87lm/W	0.9
LED F22T8/840/G/1200	22W	220-240V	Neutral White	4000K	≥80	2050lm	280°	1200mm	Type A	93lm/W	0.9
LED F22T8/865/G/1200	22W	220-240V	Daylight	6500K	≥80	2200lm	280°	1200mm	Type A	100lm/W	0.9
LED F22T8/830/G/1500	22W	220-240V	Warm White	3000K	≥80	1910lm	280°	1500mm	Type A	87lm/W	0.9
LED F22T8/840/G/1500	22W	220-240V	Neutral White	4000K	≥80	2050lm	280°	1500mm	Type A	93lm/W	0.9
LED F22T8/865/G/1500	22W	220-240V	Daylight	6500K	≥80	2200lm	280°	1500mm	Type A	100lm/W	0.9
LED F24T8/830/G/1500	24W	220-240V	Warm White	3000K	≥80	2200lm	280°	1500mm	Type A	92lm/W	0.9
LED F24T8/840/G/1500	24W	220-240V	Neutral White	4000K	≥80	2300lm	280°	1500mm	Type A	96lm/W	0.9
LED F24T8/865/G/1500	24W	220-240V	Daylight	6500K	≥80	2400lm	280°	1500mm	Type A	100lm/W	0.9




Features


- Energy saving with low power consumption
- Perfect retrofit traditional lamps for magnetic ballast circuit
- No rewiring cost for magnetic ballast circuit
- No mercury and hazardous substances

Wiring

For direct retrofit in CCG circuit, replace LED tube and LED starter




For direct connection with AC



Installation Guide

For direct retrofit in CCG circuit, replace LED tube and LED starter

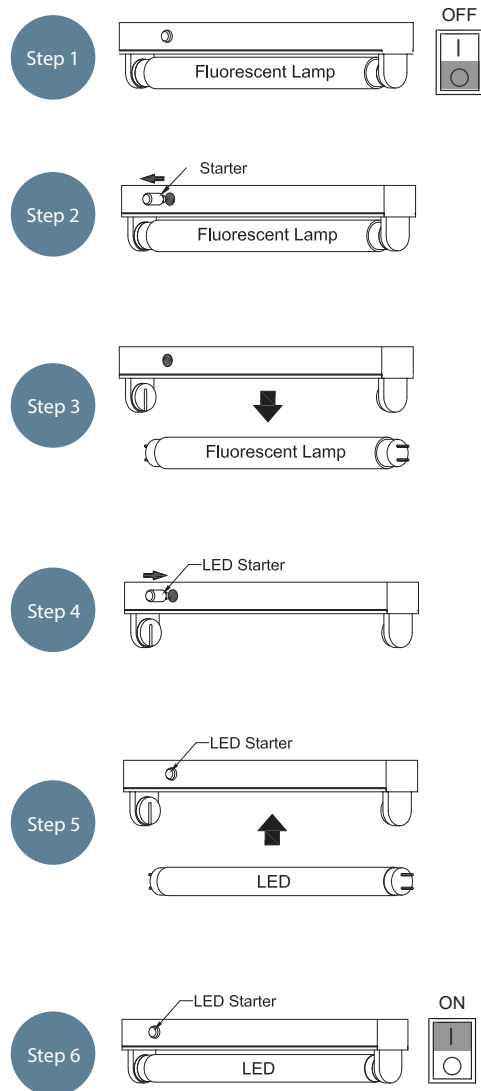

For direct connection with AC

