

INSTAlite DLC




Model	Wattage	Voltage	Color	Color Temp	CRI	Lumen	Angle	Length	Type	Efficacy	Power factor
LED F15T8/830/G/NA/IS	15W	110-277V	Warm White	3000K	≥80	1750lm	280°	48in	UL Type A	117lm/W	0.99
LED F15T8/835/G/NA/IS	15W	110-277V	White	3500K	≥80	1750lm	280°	48in	UL Type A	117lm/W	0.99
LED F15T8/840/G/NA/IS	15W	110-277V	Neutral White	4000K	≥80	1850lm	280°	48in	UL Type A	123lm/W	0.99
LED F15T8/850/G/NA/IS	15W	110-277V	Cool White	5000K	≥80	1850lm	280°	48in	UL Type A	123lm/W	0.99
LED F17T8/830/G/NA/IS	17W	110-277V	Warm White	3000K	≥80	2000lm	280°	48in	UL Type A	118lm/W	0.99
LED F17T8/835/G/NA/IS	17W	110-277V	White	3500K	≥80	2000lm	280°	48in	UL Type A	118lm/W	0.99
LED F17T8/840/G/NA/IS	17W	110-277V	Neutral White	4000K	≥80	2100lm	280°	48in	UL Type A	124lm/W	0.99
LED F17T8/850/G/NA/IS	17W	110-277V	Cool White	5000K	≥80	2100lm	280°	48in	UL Type A	124lm/W	0.99

Features

- Energy saving up to 46% compare to F32T8 system
- No mercury and hazardous substances
- Perfect retrofit traditional lamps for INSTANT START ballast circuit
- No rewiring cost
- DLC certified
- Color Rendering Index ≥80


Wiring

For direct retrofit in North America instant start ballast circuit

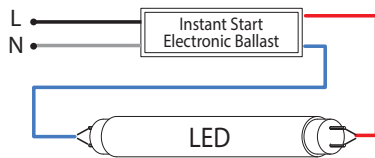

Installation Guide


Step 1




OFF




Step 2



Step 3



Step 4



ON

