



LED Downlight ND204E - ND207E

Features

- 9W / 11W / 15W / 20W / 22W LED Downlight
- Recessed round, uniform distribution
- Comfort glare-free diffuser
- Ideal replacement up to 2x26W compact fluo. downlight*
- Good color rendition, Ra ≥80

Materials / Finish

- Body: Die cast aluminium with white finish
- Trim: Die cast aluminium, UV protected
- Diffuser: Frosted PC, UV protected

Installation / Mounting

- Metal box with Ø20mm knockout facilitates conduit mounting
- Quick installation with mounting bracket
- Suitable for recessed mounting
- Integral gear unit allows quick and easy installation
- Cut out dimensions Ø110mm / Ø140mm / Ø190mm


Standards

- Designed and manufactured to comply with international standard EN60598
- Class I Electrical
- IP 20




*

	Light source					Luminaire	
	Wattage (W)	Number of Lamp(s)	System Wattage (W)	Lumen Output (lm)	Efficacy (lm/W)	Lumen Output (lm)	Efficacy (lm/W)
LED	18	1	20	2010	100	1555	77.8
CFL	18	2	40	2400	60	1200	30

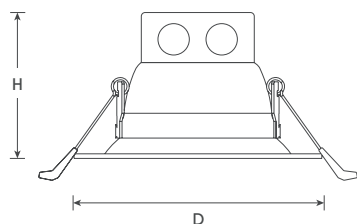

(Unit : mm)	(D)	(H)	Cut Out Dimensions
ND204E	Ø140 x	83	Ø110
ND205E	Ø180 x	85	Ø140
ND207E	Ø220 x	85	Ø190



Model	Luminaire Wattage	Color Temp	Beam Angle	Luminaire Lumen	
ND204E-9W/830	9W	3000K	90°	740lm	F
ND204E-9W/840	9W	4000K	90°	740lm	F
ND204E-9W/865	9W	6500K	90°	740lm	F
ND204E-11W/830	11W	3000K	90°	875lm	F
ND204E-11W/840	11W	4000K	90°	875lm	F
ND204E-11W/865	11W	6500K	90°	875lm	F
ND205E-15W/830	15W	3000K	90°	1165lm	F
ND205E-15W/840	15W	4000K	90°	1165lm	F
ND205E-15W/865	15W	6500K	90°	1165lm	F
ND205E-20W/830	20W	3000K	90°	1510lm	F
ND205E-20W/840	20W	4000K	90°	1510lm	F
ND205E-20W/865	20W	6500K	90°	1510lm	F
ND207E-22W/830	22W	3000K	90°	1680lm	F
ND207E-22W/840	22W	4000K	90°	1680lm	F
ND207E-22W/865	22W	6500K	90°	1680lm	F

