



LED ROADlight



Features

Ideal replacement up to 70W SON road light
Meet EN13201 Lighting Class S4 – Subsidiary roads (pedestrians and cyclists)
Replaceable LED PLL tube
Color Rendering Index : ≥ 80

Materials / Finish



Durable polycarbonate diffuser
Glass fiber housing
Stainless steel clip

Installation / Mounting

Recommended mounting height: 3-6m
Side entry installation
Post top bracket available on request

Standards

Luminaire Safety: EN60598-1, EN60598-2-3
Lamp Safety: EN62560
Lamp EMC: EN61547, EN55015, EN61000-3-2, EN61000-3-3
Road Lighting Performance: EN13201-2
Class I Electrical
IP65

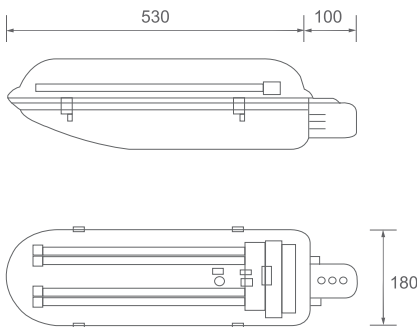

Model	Wattage	Color Temp	Luminaire Lumen	Lamp Lumen	Color	Driver
UR101A-2x22W/830	2x22W	3000K	2840 lm	4400 lm	Silver	Integral
UR101A-2x22W/840	2x22W	4000K	2970 lm	4600 lm	Silver	Integral
UR101A-2x22W/865	2x22W	6500K	3050 lm	4700 lm	Silver	Integral

Notice : We are seeking ways to improve the specification, performance and design of our products and alterations can take place without notice.