

LED RoadLight

Features

- 32W / 64W / 70W / 106W / 144W LED Roadlight
- Wide beam angles for large open area coverage
- Asymmetric optic design with uniform distribution
- Excellent heat dissipation and long life span for low maintenance cost

Materials / Finish


- Body: Die-cast aluminium
- Lens: PC
- Diffuser: Toughened glass
- Silver color

Installation / Mounting


- Mounting bracket for side entry or post top installation
- +/-5° adjustable for side entry installation
- 0-10° adjustable for post top installation

Standards


- Designed and manufactured to comply with international standard EN60598
- Class I Electrical
- IP 65

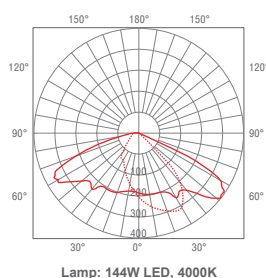

(Unit : mm)	(L)	(W)	(H)
UR4510	300	x 680	x 118
UR4511	300	x 680	x 118

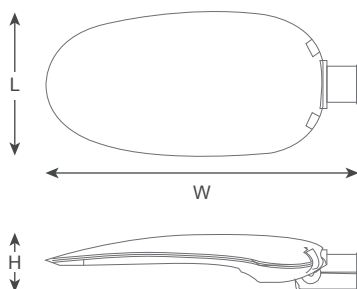

(Unit : mm)	(L)	(W)	(H)
UR4512	365	x 858	x 132
UR4513	365	x 858	x 132
UR4514	365	x 858	x 132

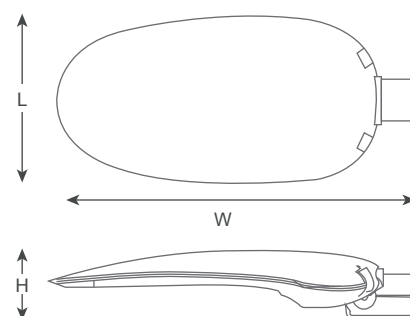

Model	Wattage	Color Temp	Lumen	Color	Driver
UR4510-3-ALB032-03	32W	3000K	3200lm	Silver	Integral
UR4510-3-ALD032-03	32W	4000K	3350lm	Silver	Integral
UR4510-3-ALG032-03	32W	6000K	3500lm	Silver	Integral
UR4511-3-ALB064-03	64W	3000K	6400lm	Silver	Integral
UR4511-3-ALD064-03	64W	4000K	6700lm	Silver	Integral
UR4511-3-ALG064-03	64W	6000K	7000lm	Silver	Integral
UR4512-3-ALB070-03	70W	3000K	7800lm	Silver	Integral
UR4512-3-ALD070-03	70W	4000K	8200lm	Silver	Integral
UR4512-3-ALG070-03	70W	6000K	8600lm	Silver	Integral
UR4513-3-ALB106-03	106W	3000K	10000lm	Silver	Integral
UR4513-3-ALD106-03	106W	4000K	10500lm	Silver	Integral
UR4513-3-ALG106-03	106W	6000K	11000lm	Silver	Integral
UR4514-3-ALB144-03	144W	3000K	14400lm	Silver	Integral
UR4514-3-ALD144-03	144W	4000K	15100lm	Silver	Integral
UR4514-3-ALG144-03	144W	6000K	15800lm	Silver	Integral

Notice : We are seeking ways to improve the specification, performance and design of our products and alterations can take place without notice.



LED RoadLight

UR4510-4514

