



LED Shoebox UF111E - UF113E

Features

- 50W / 80W / 100W / 150W / 200W / 300W LED Shoebox
- Customized lens from Type I to Type V
- Support different mounting demands
- High efficacy >160lm/W
- Uniform light output
- Support multi-applications such as parking lot light, street light, tunnel light, wall pack and floodlight
- Photocell optional
- Good color rendition, Ra ≥70

Materials / Finish

- Body: Die cast aluminium housing with PC lens
- Chips: Lumileds
- Black color

Installation / Mounting


- Flexible installation wall mounted with various accessories available

Standards

- ETL, FCC, DLC



Accessories

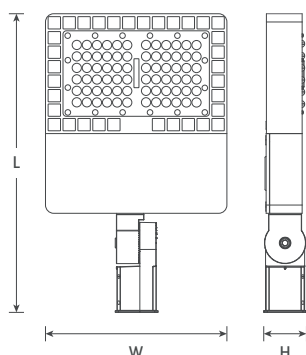

(Unit : inch)	(L)	(W)	(H)
UF111E	18.5 x	10.7 x	1.97
UF112E	23.5 x	13 x	3.46
UF113E	31 x	13 x	3.46

Model	Voltage	Wattage	Color Temp	Beam Angle	Lumen
UF111E-50W/730	100 - 277V	50W	3000K	125 x 46°	7500lm
UF111E-50W/740	100 - 277V	50W	4000K	125 x 46°	7750lm
UF111E-50W/750	100 - 277V	50W	5000K	125 x 46°	8000lm
UF111E-80W/730	100 - 277V	80W	3000K	125 x 46°	12000lm
UF111E-80W/740	100 - 277V	80W	4000K	125 x 46°	12400lm
UF111E-80W/750	100 - 277V	80W	5000K	125 x 46°	12800lm
UF112E-100W/730	100 - 277V	100W	3000K	125 x 46°	15000lm
UF112E-100W/740	100 - 277V	100W	4000K	125 x 46°	15500lm
UF112E-100W/750	100 - 277V	100W	5000K	125 x 46°	16000lm
UF112E-150W/730	100 - 277V	150W	3000K	125 x 46°	22500lm
UF112E-150W/740	100 - 277V	150W	4000K	125 x 46°	23250lm
UF112E-150W/750	100 - 277V	150W	5000K	125 x 46°	24000lm
UF113E-200W/730	100 - 277V	200W	3000K	125 x 46°	30000lm
UF113E-200W/740	100 - 277V	200W	4000K	125 x 46°	31000lm
UF113E-200W/750	100 - 277V	200W	5000K	125 x 46°	32000lm
UF113E-300W/730	100 - 277V	300W	3000K	125 x 46°	45000lm
UF113E-300W/740	100 - 277V	300W	4000K	125 x 46°	46500lm
UF113E-300W/750	100 - 277V	300W	5000K	125 x 46°	48000lm

