

LED TRACKLight

Features

19W / 26W LED Tracklight
Precise beam control by frosted aluminium reflector
Adjustable head spot lighting
Comfort glare-free light
Color Rendering Index: ≥ 80

Materials / Finish





Body : Die-cast aluminium
Reflector : Anodised PC
Diffuser : Toughened glass
Choice of White, Black color

Installation / Mounting

Suitable for 2-wire single phase and 3-wire three track
Flexible and easy installation

Standards

Designed and manufactured to comply with international standard EN60598
Class I Electrical
IP 20

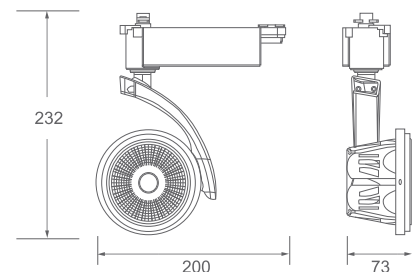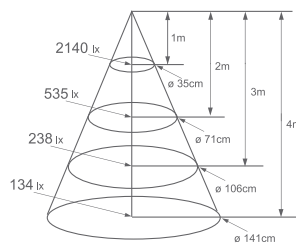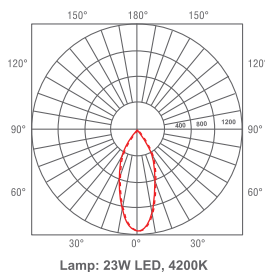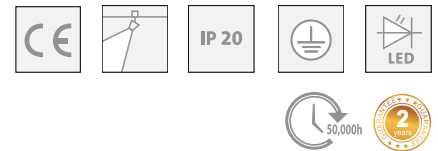

Model	Wattage	Color Temp	Beam Angle	Lumen	Color	Driver
NT5008-3-ALB019-01	19W	3000K	12°/20°	1300 lm	White / Black	500mA
NT5008-3-ALD019-01	19W	4200K	12°/20°	1400 lm	White / Black	500mA
NT5008-3-ALG019-01	19W	5000K	12°/20°	1500 lm	White / Black	500mA
NT5008-3-ALB026-01	26W	3000K	12°/20°	1850 lm	White / Black	700mA
NT5008-3-ALD026-01	26W	4200K	12°/20°	1950 lm	White / Black	700mA
NT5008-3-ALG026-01	26W	5000K	12°/20°	2000 lm	White / Black	700mA

• replace last 2 digits on ordering code



Notice : We are seeking ways to improve the specification, performance and design of our products and alterations can take place without notice.