


LED 天花灯 ND171E-175E

15W/20W/15Wx2/20Wx2




图表

尺寸:

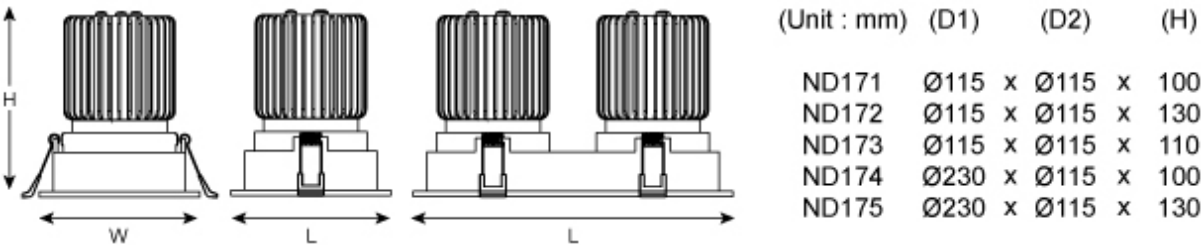

ND171,ND172 正视图:

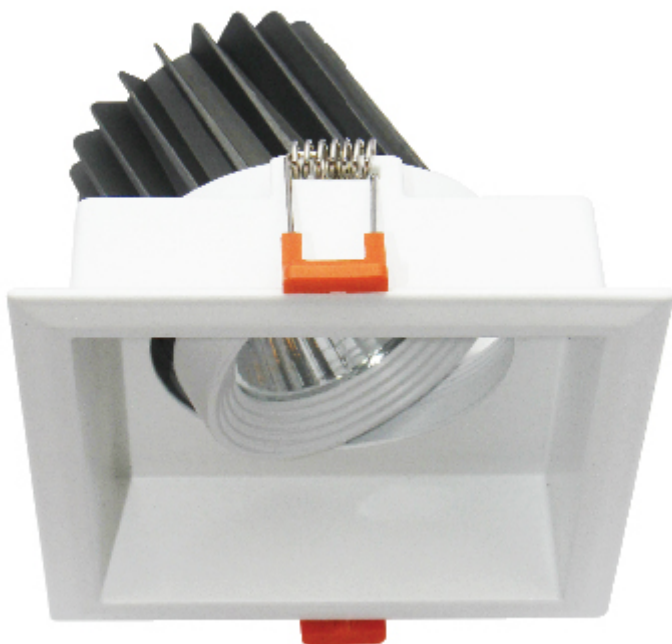


ND173 正视图:



ND174,ND175 正视图:



ND17 后视图:

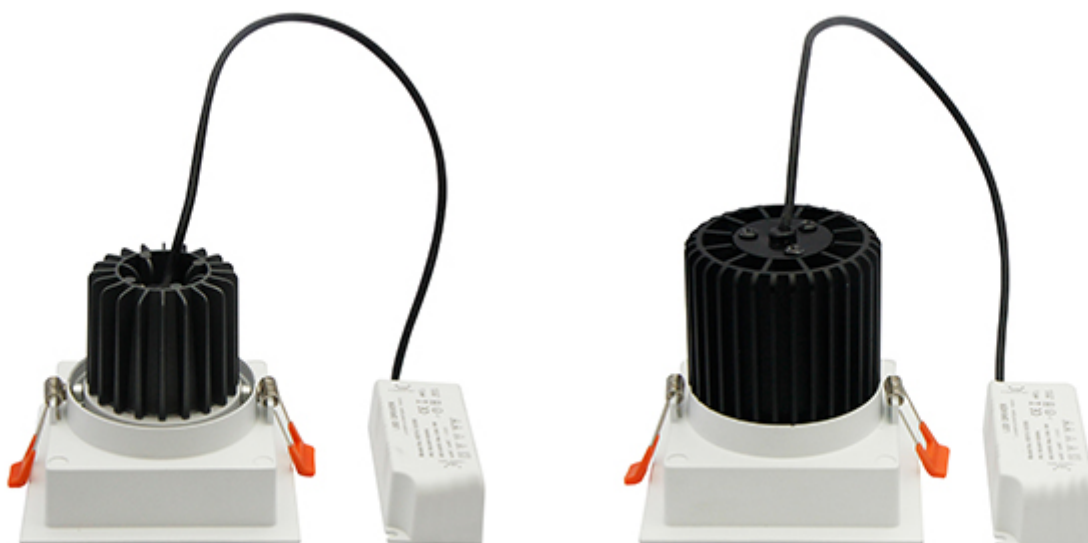

佑昌灯光器材有限公司

电话: (852) 2511 0022 传真: (852) 2511 0082 网址: www.prosperitylamps.com 电子邮件: info@prosperitylamps.com

©2024 佑昌灯光器材有限公司 保留所有权利

ND17 仰视图:



标准



应用



技术参数	
电参数	
额定功率 [W]	15W / 20W / 15Wx2 / 20Wx2
额定电压 [V/Hz]	100–240V, 50/60Hz
功率因数 @230V	0.95
输入电流 [mA] @230V	69 / 92 / 137 / 183
LED	COB
产品型号	
ND171E–15W/8XX	15W (1 x COB 13W, 350mA, 36±2Vdc, 1485–1585lm)
ND172E–20W/8XX	20W (1 x COB 16W, 450mA, 36±2Vdc, 1780–1880lm)
ND173E–15W/8XX	15W (1 x COB 13W, 350mA, 36±2Vdc, 1485–1585lm)
ND174E–15Wx2/8XX	15Wx2 (2 x COB 13W, 350mA, 36±2Vdc, 1485–1585lm)
ND175E–20Wx2/8XX	20Wx2 (2 x COB 16W, 450mA, 36±2Vdc, 1780–1880lm)
光通量 [lm]	
15W	1100lm / 1160lm @3000K
	1150lm / 1210lm @4000K
	1200lm / 1260lm @6500K
20W	1470lm @3000K
	1530lm @4000K
	1590lm @6500K

15Wx2	2200lm @3000K
	2300lm @4000K
	2400lm @6500K
20Wx2	2940lm @3000K
	3060lm @4000K
	3180lm @6500K
光效性能	
色容差	<6
光效 [lm/W]	73-84
显色指数 [Ra]	≥80
光束角 [°]	36
额定寿命, Ta@25° C [hrs]	50,000
6000小时后, 灯残存率	>0.9
6000小时后, 光通维持率	>0.8
开关次数	>15,000
启动时间 [S]	<0.5
预热时间 [S]	<2
1000小时后, 失效率	<5%
尺寸和物料	
长度 L [mm]	115 / 115 / 115 / 230 / 230
宽度 W [mm]	115
高度 H [mm]	100 / 130 / 110 / 100 / 130
开孔尺寸 [mm]	100*100 / 215*100
物料	Body: Die-cast aluminium
	Trim: Die-cast aluminium
	Reflector: High purity, anodized aluminium
标准	
CE-LVD	EN60598-1, EN60598-2-2
CE-EMC	EN55015, EN61547, EN61000-3-2, EN61000-3-3
汞含量 [mg]	0.0
电器保护等级	II
其他	
调光 [Y/N]	Optional
工作温度	-10° C ~ 40° C
存储温度	-20° C ~ 60° C