


LED 高棚灯 Hybrid Lamp 120V 105W/150W



图表

尺寸:

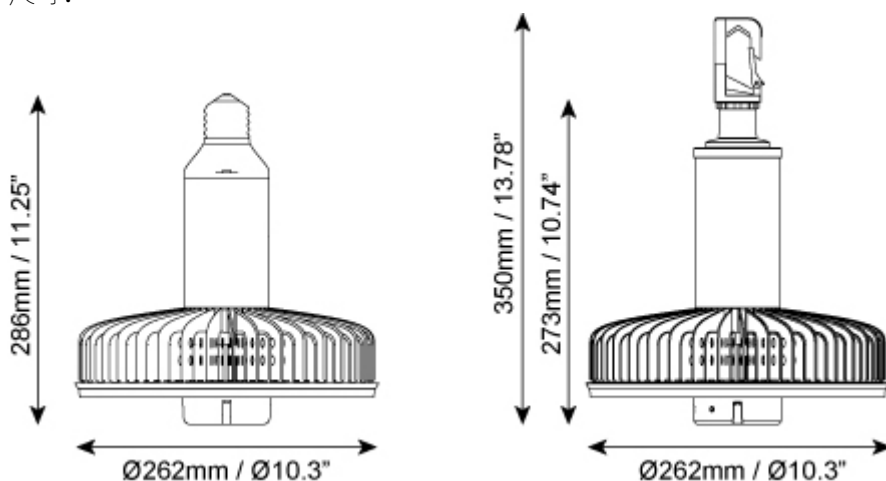

标准



佑昌灯光器材有限公司

电话: (852) 2511 0022 传真: (852) 2511 0082 网址: www.prosperitylamps.com 电子邮件: info@prosperitylamps.com

应用



技术参数		
电参数		
额定功率 [W]	105W / 150W	
额定电压 [V/Hz]	90–305Vac, 50/60Hz	
功率因数 @120V	0.9	
输入电流 [mA] @120V	972 / 1390	
LED	SMD	
产品型号		
NH101–105W/840	105W	
NH101–105W/850	105W	
NH102–150W/840*	150W	
NH102–150W/850*	150W	
光通量 [lm]		
105W	15000lm @4000K	
	15000lm @5000K	
150W	20000lm @4000K	
	20000lm @5000K	
光效性能		
色容差	<6	
预计每年能源支出 [\$USD]	12.65 / 18.07	
光效 [lm/W]	133–143	
显色指数 [Ra]	≥80	
色效维持 [hr]	>6000	
光度分布 [°]	90	
寿命 [yrs] (每日使用3小时)	46	
6000小时后, 光通维持率	>0.8	
开关测试	>15,000 cycles	
启动时间 [S]	<0.5	
LED 失效率	<5%	
尺寸和物料		
直径 D [in]	Φ10.3	
高度 H [in]	11.25, 13.78 (Hook mount)	
灯头	EX39 / Hook mount	
物料	Body: Anodized aluminium	
	Optics: PC	
标准		
ANSI	UL8750, UL1993, C82.77–2002, C78.377–2008	
FCC	FCC CFR Part 15	
汞含量 [mg]	0.0	
其他		

调光 [Y/N]	Y
工作温度	-20° C ~ 50° C
存储温度	-10° C ~ 30° C