



LED Downlight ND381E - ND386E

Features

- 3W / 6W / 9W / 12W / 18W / 24W LED Downlight
- Recessed square, uniform distribution
- Comfort glare-free diffuser
- Ideal replacement up to 2x26W compact fluo. downlight
- Low profile and slim (only 21-28mm deep), suitable for shallow ceiling void
- Integral driver
- Good color rendition, Ra ≥80

Materials / Finish


- Body: Die cast aluminium with white finish
- Trim: Die cast aluminium, UV protected
- Diffuser: Frosted PS, UV protected

Installation / Mounting


- Quick installation with mounting bracket
- Suitable for recessed mounting
- Integral gear unit allows quick and easy installation
- Cut out dimensions 75x75mm / 115x115mm / 130x130mm / 155x155mm / 185x185mm / 250x250mm

Standards

- Designed and manufactured to comply with international standard EN60598
- Class II Electrical
- IP 20

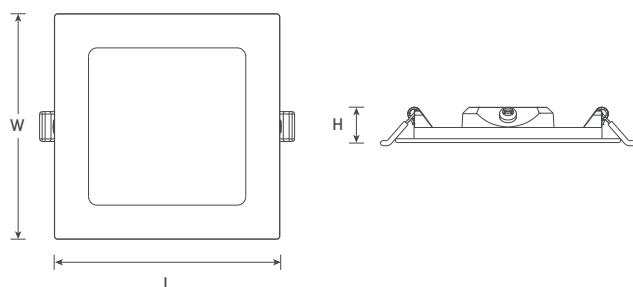

| (Unit : mm) | (L) | | (W) | | (H) | Cut Out Dimensions |
|---------------|-----|---|-----|---|-----|--------------------|
| ND381E | 90 | x | 90 | x | 21 | 75 x 75 |
| ND382E | 128 | x | 128 | x | 23 | 115 x 115 |
| ND383E | 147 | x | 147 | x | 23 | 130 x 130 |
| ND384E | 170 | x | 170 | x | 23 | 155 x 155 |
| ND385E | 202 | x | 202 | x | 23 | 185 x 185 |
| ND386E | 270 | x | 270 | x | 28 | 250 x 250 |



| Model | Voltage | Luminaire Wattage | Color Temp | Beam Angle | Luminaire Lumen | |
|----------------|------------|-------------------|------------|------------|-----------------|---|
| ND381E-3W/830 | 220 - 240V | 3W | 3000K | 120° | 150lm | G |
| ND381E-3W/840 | 220 - 240V | 3W | 4000K | 120° | 160lm | G |
| ND381E-3W/865 | 220 - 240V | 3W | 6500K | 120° | 170lm | G |
| ND382E-6W/830 | 220 - 240V | 6W | 3000K | 120° | 430lm | G |
| ND382E-6W/840 | 220 - 240V | 6W | 4000K | 120° | 450lm | F |
| ND382E-6W/865 | 220 - 240V | 6W | 6500K | 120° | 475lm | F |
| ND383E-9W/830 | 220 - 240V | 9W | 3000K | 120° | 760lm | F |
| ND383E-9W/840 | 220 - 240V | 9W | 4000K | 120° | 780lm | F |
| ND383E-9W/865 | 220 - 240V | 9W | 6500K | 120° | 810lm | F |
| ND384E-12W/830 | 220 - 240V | 12W | 3000K | 120° | 950lm | F |
| ND384E-12W/840 | 220 - 240V | 12W | 4000K | 120° | 1045lm | F |
| ND384E-12W/865 | 220 - 240V | 12W | 6500K | 120° | 1140lm | E |
| ND385E-18W/830 | 220 - 240V | 18W | 3000K | 120° | 1660lm | F |
| ND385E-18W/840 | 220 - 240V | 18W | 4000K | 120° | 1710lm | E |
| ND385E-18W/865 | 220 - 240V | 18W | 6500K | 120° | 1760lm | E |
| ND386E-24W/830 | 220 - 240V | 24W | 3000K | 120° | 2185lm | F |
| ND386E-24W/840 | 220 - 240V | 24W | 4000K | 120° | 2280lm | E |
| ND386E-24W/865 | 220 - 240V | 24W | 6500K | 120° | 2375lm | E |

