




LED T5 Global CC



Features

- Two pins connection allows flexible wiring for light up and bi-directional tube installation
- Auto-correcting polarity protection
- 12 types of wiring combination in one tube
- External constant current driver (UL Type C)
- High efficacy up to 150lm/W
- Wattage and lumen can be adjusted by a driver with lower output current
- Suitable for LED emergency lighting
- Remote driver allows for superior heat dissipation performance and longer average lifetime
- Dimming and control system integration is possible based on selected driver model
- No mercury and hazardous substances
- Energy saving with low power consumption
- Smooth operation even at low temperatures
- Full glass body
- Good color rendition, $R_a \geq 80$



- EM lighting
- Extensive compatibility

Dimming Options

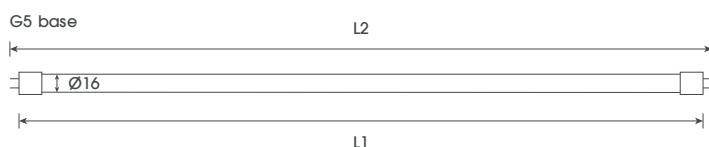

Model	Wattage	Current	Voltage	Color Temp	Beam Angle	Type	Length L1 / L2	Efficacy	Lumen	
LED F4T5/CC/830/300	4W	C.C.350mA	9 - 13V	3000K	270°	UL Type C	288mm / 302mm	145lm/W	580lm	E
LED F4T5/CC/840/300	4W	C.C.350mA	9 - 13V	4000K	270°	UL Type C	288mm / 302mm	148lm/W	590lm	D
LED F4T5/CC/865/300	4W	C.C.350mA	9 - 13V	6500K	270°	UL Type C	288mm / 302mm	150lm/W	600lm	D
LED F8T5/CC/830/600	8W	C.C.350mA	21 - 25V	3000K	270°	UL Type C	549mm / 563mm	145lm/W	1160lm	E
LED F8T5/CC/840/600	8W	C.C.350mA	21 - 25V	4000K	270°	UL Type C	549mm / 563mm	148lm/W	1180lm	D
LED F8T5/CC/865/600	8W	C.C.350mA	21 - 25V	6500K	270°	UL Type C	549mm / 563mm	150lm/W	1200lm	D
LED F12T5/CC/830/900	12W	C.C.350mA	31 - 37V	3000K	270°	UL Type C	849mm / 863mm	145lm/W	1740lm	E
LED F12T5/CC/840/900	12W	C.C.350mA	31 - 37V	4000K	270°	UL Type C	849mm / 863mm	148lm/W	1770lm	D
LED F12T5/CC/865/900	12W	C.C.350mA	31 - 37V	6500K	270°	UL Type C	849mm / 863mm	150lm/W	1800lm	D
LED F16T5/CC/830/1200	16W	C.C.350mA	42 - 48V	3000K	270°	UL Type C	1149mm / 1163mm	145lm/W	2320lm	E
LED F16T5/CC/840/1200	16W	C.C.350mA	42 - 48V	4000K	270°	UL Type C	1149mm / 1163mm	148lm/W	2360lm	D
LED F16T5/CC/865/1200	16W	C.C.350mA	42 - 48V	6500K	270°	UL Type C	1149mm / 1163mm	150lm/W	2400lm	D
LED F20T5/CC/830/1500	20W	C.C.500mA	36 - 44V	3000K	270°	UL Type C	1449mm / 1463mm	145lm/W	2900lm	E
LED F20T5/CC/840/1500	20W	C.C.500mA	36 - 44V	4000K	270°	UL Type C	1449mm / 1463mm	148lm/W	2950lm	D
LED F20T5/CC/865/1500	20W	C.C.500mA	36 - 44V	6500K	270°	UL Type C	1449mm / 1463mm	150lm/W	3000lm	D
LED F28T5/CC/830/1500	28W	C.C.700mA	38 - 42V	3000K	270°	UL Type C	1449mm / 1463mm	145lm/W	4060lm	E
LED F28T5/CC/840/1500	28W	C.C.700mA	38 - 42V	4000K	270°	UL Type C	1449mm / 1463mm	148lm/W	4130lm	D
LED F28T5/CC/865/1500	28W	C.C.700mA	38 - 42V	6500K	270°	UL Type C	1449mm / 1463mm	150lm/W	4200lm	D

Circuits

