

LED Downlight ND301E - ND309E

Features

- 15W LED Downlight
- Recessed round, uniform distribution
- Twist-lock changeable LED module for inventory cost saving
- Ideal replacement up to 100W halogen downlight
- Adjustable tilting angle of $\pm 23^\circ$ vertically (ND303E, ND304E, ND306E, ND307E, ND308E)
- Good color rendition, $R_a \geq 80$ / 90

Materials / Finish

- Body: Die cast aluminium
- Trim: Die cast aluminium
- Reflector: High purity, anodized aluminium


Installation / Mounting

- Quick installation with mounting bracket
- Suitable for recessed mount
- Remote gear unit allows flexible and easy installation
- Cut out dimensions $\varnothing 75\text{mm}$, $75 \times 75\text{mm}$

Standards

- Designed and manufactured to comply with international standard EN60598
- Class II Electrical
- IP 20, IP 54

Dimming Options

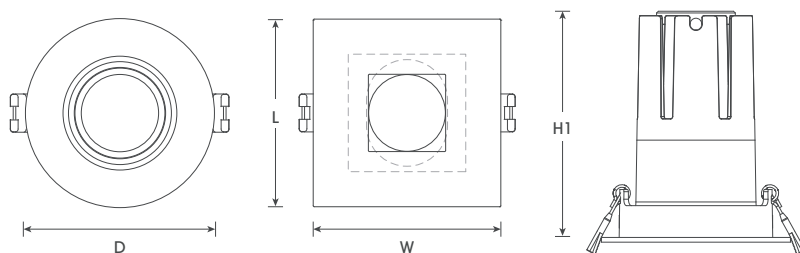

(Unit : mm)	(D)	(H1)	(H2)	Cut Out Dimensions
ND301E	$\varnothing 88$ x	108 x	48	$\varnothing 75$
ND302E	$\varnothing 88$ x	108 x	48	$\varnothing 75$
ND303E	$\varnothing 88$ x	108 x	48	$\varnothing 75$
ND304E	$\varnothing 88$ x	108 x	48	$\varnothing 75$
ND307E	$\varnothing 88$ x	124 x	64	$\varnothing 75$
ND308E	$\varnothing 88$ x	124 x	68	$\varnothing 75$

(Unit : mm)	(L)	(W)	(H1)	(H2)	Cut Out Dimensions
ND305E	88 x	88 x	108 x	48	$\varnothing 75$
ND306E	88 x	88 x	108 x	48	$\varnothing 75$
ND309E	88 x	88 x	108 x	48	75×75



Model	Luminaire Wattage	Driver	Color Temp	Beam Angle	Luminaire Lumen	
ND301E-15W/8XX	15W	C.C. 350mA	3000K / 4000K / 6500K	20° / 30° / 38° / 50°	1180lm / 1230lm / 1280lm	F
ND302E-15W/8XX	15W	C.C. 350mA	3000K / 4000K / 6500K	20° / 30° / 38° / 50°	1180lm / 1230lm / 1280lm	F
ND303E-15W/8XX	15W	C.C. 350mA	3000K / 4000K / 6500K	20° / 30° / 38° / 50°	1180lm / 1230lm / 1280lm	F
ND304E-15W/8XX	15W	C.C. 350mA	3000K / 4000K / 6500K	20° / 30° / 38° / 50°	1180lm / 1230lm / 1280lm	F
ND305E-15W/8XX	15W	C.C. 350mA	3000K / 4000K / 6500K	20° / 30° / 38° / 50°	1180lm / 1230lm / 1280lm	F
ND306E-15W/8XX	15W	C.C. 350mA	3000K / 4000K / 6500K	20° / 30° / 38° / 50°	1180lm / 1230lm / 1280lm	F
ND307E-15W/8XX	15W	C.C. 350mA	3000K / 4000K / 6500K	20° / 30° / 38° / 50°	1180lm / 1230lm / 1280lm	F
ND308E-15W/8XX	15W	C.C. 350mA	3000K / 4000K / 6500K	20° / 30° / 38° / 50°	1180lm / 1230lm / 1280lm	F
ND309E-15W/8XX	15W	C.C. 350mA	3000K / 4000K / 6500K	20° / 30° / 38° / 50°	1180lm / 1230lm / 1280lm	F

