



LED Tracklight NK111E - NK114E

Features

- 10W / 20W / 30W / 40W LED Tracklight
- Precise beam control by aluminium reflector
- Adjustable head spot lighting
- Comfort glare-free light
- High color rendition, Ra ≥ 90

Materials / Finish



- Body: Die cast aluminium
- Reflector: Anodised faceted aluminium
- Diffuser: Toughened glass
- Choice of White and Black color

Installation / Mounting


- Suitable for 2-wire, 3-wire track, 4-wire three phase track
- Flexible and easy installation

Standards

- Designed and manufactured to comply international standard EN60598
- Class I Electrical
- IP 20

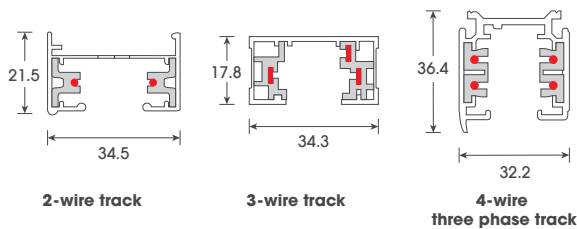

(Unit : mm)	(D)	(L)	(H)
NK111E	Ø67 x	106 x	230
NK112E	Ø88 x	106 x	243
NK113E	Ø101 x	106 x	270
NK114E	Ø101 x	106 x	270



(Unit : mm)	(D)	(L)	(H) 3wire / 4wire
NK111E	Ø67 x	106 x	230 / 255
NK112E	Ø88 x	106 x	243 / 268
NK113E	Ø101 x	106 x	270 / 295
NK114E	Ø101 x	106 x	270 / 295



Model	Voltage	Luminaire Wattage	Color Temp	Beam Angle	Luminaire Lumen	
NK111E-10W/930	220 - 240V	10W	3000K	20° / 40° / 60°	680lm	G
NK111E-10W/940	220 - 240V	10W	4000K	20° / 40° / 60°	730lm	F
NK111E-10W/965	220 - 240V	10W	6500K	20° / 40° / 60°	775lm	F
NK112E-20W/930	220 - 240V	20W	3000K	20° / 40° / 60°	1550lm	F
NK112E-20W/940	220 - 240V	20W	4000K	20° / 40° / 60°	1650lm	F
NK112E-20W/965	220 - 240V	20W	6500K	20° / 40° / 60°	1745lm	F
NK113E-30W/930	220 - 240V	30W	3000K	20° / 40° / 60°	2330lm	F
NK113E-30W/940	220 - 240V	30W	4000K	20° / 40° / 60°	2425lm	F
NK113E-30W/965	220 - 240V	30W	6500K	20° / 40° / 60°	2520lm	F
NK114E-40W/930	220 - 240V	40W	3000K	20° / 40° / 60°	3105lm	F
NK114E-40W/940	220 - 240V	40W	4000K	20° / 40° / 60°	3200lm	F
NK114E-40W/965	220 - 240V	40W	6500K	20° / 40° / 60°	3300lm	F

EUROPE

INDOOR LUMINAIRE