

LED Shop Light NL261E

42W


Features

- 42W LED Shoplight
- Suitable to use in factories, offices, banks, shopping centers, subways, schools and other places
- Enclosed with reflector
- Applicable in damp location
- Long average life 50000 hours
- Good color rendition, $R_a \geq 80$



Diagrams

Dimensions:

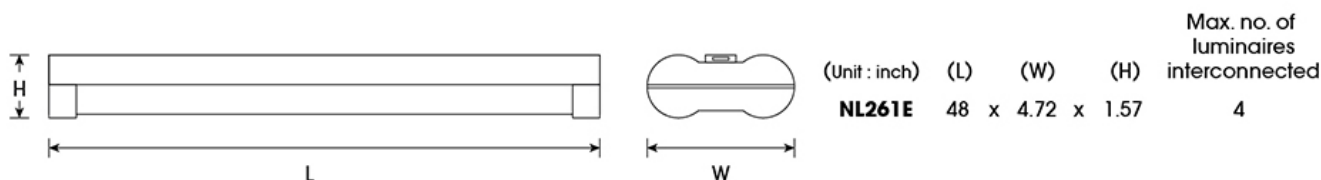

Standards



Prosperity Lamps & Components Ltd.

Tel: (852) 2511 0022 Fax: (852) 2511 0082 Web: www.prosperitylamps.com Email: info@prosperitylamps.com

Applications


Office


Shopping mall


School


Factory


Airport


Station

Technical Data	
Electrical	
Rated Wattage [W]	42W
Rated Voltage [V/Hz]	100-277Vac, 50/60Hz
Power Factor @120Vac	0.9
Input Current [mA] @120Vac	389
Model	
NL261E-42W/840	42W
Luminous Flux [lm]	
42W	4000lm
Performance	
SDCM	<6
Estimated Yearly Energy Cost [\$USD]	5.06
Luminous Efficacy [lm/W]	95
Color Rendering Index [Ra]	≥80
Color Maintenance [hr]	>6000
Luminous Intensity Distribution [°]	120
Life [Yrs] (based on 3hrs/day)	46
Lumen Maintenance at 6000hrs	>0.8
Rapid Cycle Stress	>15,000 cycles
Start Time [sec]	<0.5
LED Failure	<5%
Max. no. of luminaires interconnected	4
Mechanical	
Width W [in]	4.72
Height H [in]	1.57
Length L [in]	48
Material	
Body: Powder coated iron	
Reflector: white powder coated, sheet steel	
Standard Compliance	
ETL	UL8750, UL1993, UL1598, C82.77-2002, C78.377-2008
Mercury Content [mg]	0.0
Energy Star	Y
Other	
Dimmable [Y/N]	N

Operation Temperature	-10°C ~ 40°C
Storage Temperature	-20°C ~ 60°C