



LED Downlight ND371E - ND374E

Features

- 15W / 24W / 32W / 41W LED Downlight
- Recessed round, uniform distribution
- Ideal replacement up to 70W HID downlight
- Special color spectrum for aquarium, agriculture and food display available on request
- Adjustable tilting angle of 0°-30° vertically
- Good color rendition, Ra ≥80
- Dimmable as option

Materials / Finish

- Body: Die cast aluminium
- Trim: Die cast aluminium


Installation / Mounting

- Quick installation with mounting bracket
- Suitable for recessed mount
- Remote gear unit allows flexible and easy installation
- Cut out dimensions Ø100mm / Ø125mm / Ø170mm / Ø210mm

Standards

- Designed and manufactured to comply with international standard EN60598
- Class II Electrical
- IP 20

Dimming Options

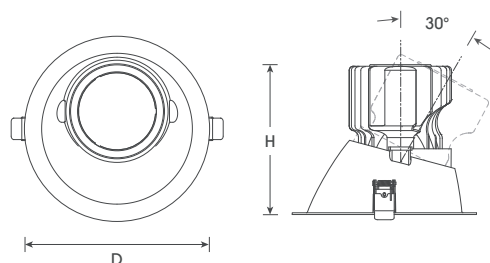


(Unit : mm)	(D)	(H)	Cut Out Dimensions
ND371E	Ø115	x 96	Ø100
ND372E	Ø138	x 124	Ø125
ND373E	Ø190	x 152	Ø170
ND374E	Ø230	x 187	Ø210



EUROPE



INDOOR LUMINAIRE



Model	Voltage	Luminaire Wattage	Driver	Color Temp	Beam Angle	Luminaire Lumen	ENERGY STAR
ND371E-15W/830	220 - 240V	15W	DC 36±2V C.C. 350mA	3000K	15° / 24° / 38°	1180lm	F
ND371E-15W/840	220 - 240V	15W	DC 36±2V C.C. 350mA	4000K	15° / 24° / 38°	1215lm	F
ND371E-15W/850	220 - 240V	15W	DC 36±2V C.C. 350mA	5000K	15° / 24° / 38°	1260lm	F
ND372E-24W/830	220 - 240V	24W	DC 36±2V C.C. 600mA	3000K	15° / 24° / 38°	2085lm	F
ND372E-24W/840	220 - 240V	24W	DC 36±2V C.C. 600mA	4000K	15° / 24° / 38°	2135lm	F
ND372E-24W/850	220 - 240V	24W	DC 36±2V C.C. 600mA	5000K	15° / 24° / 38°	2185lm	F
ND373E-32W/830	220 - 240V	32W	DC 36±2V C.C. 800mA	3000K	15° / 24° / 38°	2860lm	F
ND373E-32W/840	220 - 240V	32W	DC 36±2V C.C. 800mA	4000K	15° / 24° / 38°	2910lm	F
ND373E-32W/850	220 - 240V	32W	DC 36±2V C.C. 800mA	5000K	15° / 24° / 38°	2960lm	F
ND374E-41W/830	220 - 240V	41W	DC 36±2V C.C. 1050mA	3000K	15° / 24° / 38°	3735lm	F
ND374E-41W/840	220 - 240V	41W	DC 36±2V C.C. 1050mA	4000K	15° / 24° / 38°	3785lm	F
ND374E-41W/850	220 - 240V	41W	DC 36±2V C.C. 1050mA	5000K	15° / 24° / 38°	3830lm	F