



## LED Roadlight UR121E - UR124E

### Features

- 40W / 50W / 60W / 80W / 100W / 120W / 150W / 200W LED Roadlight
- Wide beam angles for large open area coverage
- Asymmetric optic design with uniform distribution
- Integral driver
- Excellent heat dissipation and long life span for low maintenance cost

### Materials / Finish

- Body: Die cast aluminium
- Lens: PC
- Diffuser: Tempered glass
- Grey color

### Installation / Mounting

- Mounting bracket for side entry or post top installation
- +/-15° adjustable for side entry installation
- +/-15° adjustable for post top installation
- Suitable for Ø60mm spigot

### Standards

- Designed and manufactured to comply with international standard EN60598
- Class I Electrical
- IK 09, IP 66


### Optional receptacle and photocell




+/-15° adjustable for side entry installation




+/-15° adjustable for post top installation

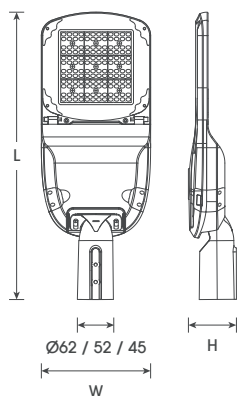


	(Unit : mm)	(L)	(W)	(H)	Weight
<b>UR121E</b>	555 x 200 x 105	555	200	105	3.35 kg
<b>UR122E</b>	615 x 233 x 100	615	233	100	3.77 kg
<b>UR123E</b>	672 x 260 x 100	672	260	100	4.75 kg
<b>UR124E</b>	725 x 310 x 113	725	310	113	5.52 kg




Lamp: LED 150W 3000K  
TYPE II PC lens



Lamp: LED 150W 3000K  
TYPE III PC lens



Lamp: LED 150W 3000K  
TYPE IV PC lens




Lamp: LED 150W 3000K  
TYPE V PC lens





## LED Roadlight UR121E - UR124E

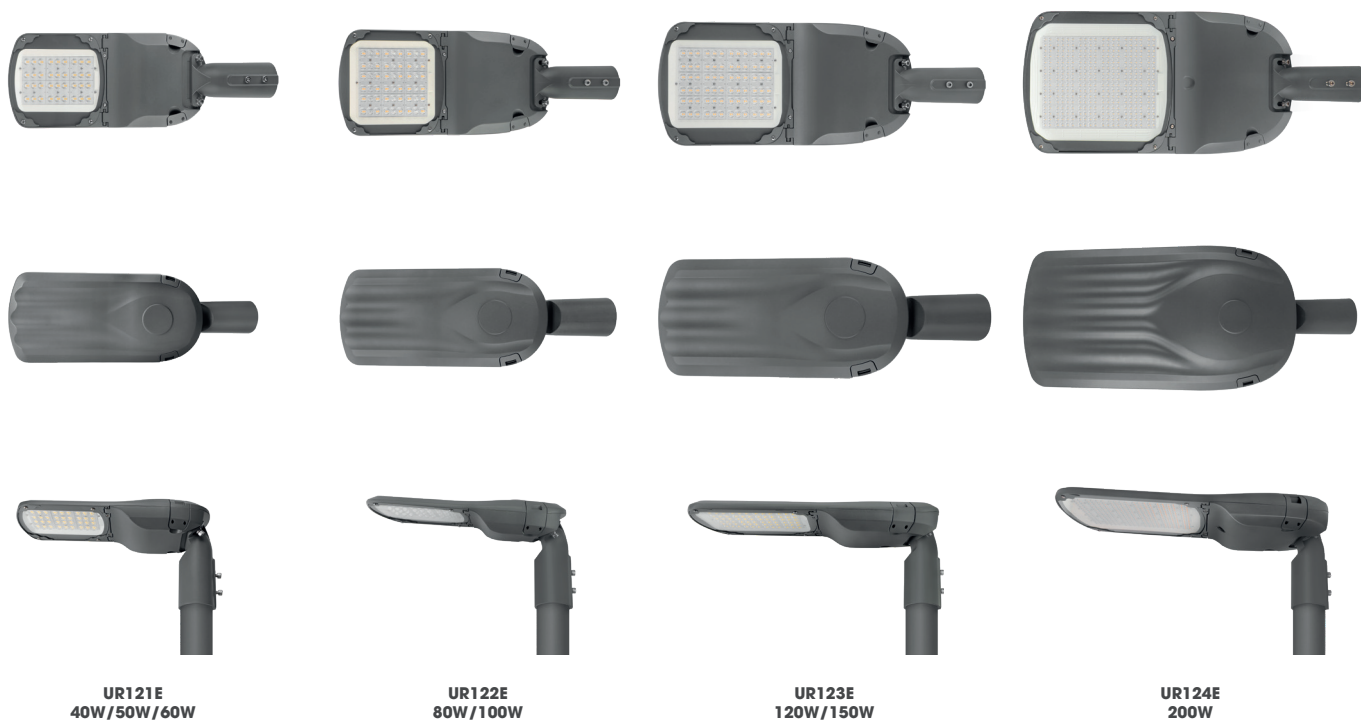

EUROPE



OUTDOOR LUMINAIRE



Model	Voltage	Luminaire Wattage	Color Temp	Luminaire Lumen	
UR121E-40W/730	100 - 277V	40W	3000K	5320lm	D
UR121E-40W/740	100 - 277V	40W	4000K	5510lm	C
UR121E-40W/765	100 - 277V	40W	6500K	5700lm	C
UR121E-50W/730	100 - 277V	50W	3000K	6650lm	D
UR121E-50W/740	100 - 277V	50W	4000K	6890lm	C
UR121E-50W/765	100 - 277V	50W	6500K	7125lm	C
UR121E-60W/730	100 - 277V	60W	3000K	7980lm	D
UR121E-60W/740	100 - 277V	60W	4000K	8265lm	C
UR121E-60W/765	100 - 277V	60W	6500K	8550lm	C
UR122E-80W/730	100 - 277V	80W	3000K	10640lm	D
UR122E-80W/740	100 - 277V	80W	4000K	11020lm	C
UR122E-80W/765	100 - 277V	80W	6500K	11400lm	C
UR122E-100W/730	100 - 277V	100W	3000K	13300lm	D
UR122E-100W/740	100 - 277V	100W	4000K	13775lm	C
UR122E-100W/765	100 - 277V	100W	6500K	14250lm	C
UR123E-120W/730	100 - 277V	120W	3000K	15960lm	D
UR123E-120W/740	100 - 277V	120W	4000K	16530lm	C
UR123E-120W/765	100 - 277V	120W	6500K	17100lm	C
UR123E-150W/730	100 - 277V	150W	3000K	19950lm	D
UR123E-150W/740	100 - 277V	150W	4000K	20660lm	C
UR123E-150W/765	100 - 277V	150W	6500K	21375lm	C
UR124E-200W/730	100 - 277V	200W	3000K	26600lm	D
UR124E-200W/740	100 - 277V	200W	4000K	27550lm	C
UR124E-200W/765	100 - 277V	200W	6500K	28500lm	C