

LED T8 Global CC



Features

- Two pins connection allows flexible wiring for light up and bi-directional tube installation
- Auto-correcting polarity protection
- 12 types of wiring combination in one tube
- External constant current driver (UL Type C)
- High efficacy up to 140lm/W
- Wattage and lumen can be adjusted by a driver with lower output current
- Suitable for LED emergency lighting
- Remote driver allows for superior heat dissipation performance and longer average lifetime
- Dimming and control system integration is possible based on selected driver model
- No mercury and hazardous substances
- Energy saving with low power consumption
- Smooth operation even at low temperatures
- Full glass body
- Good color rendition, $R_a \geq 80$





- High efficacy
- EM lighting
- Extensive compatibility

EUROPE

TUBE

Dimming Options

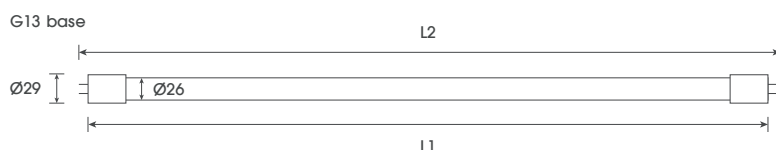

Model	Wattage	Current	Voltage	Color Temp	Beam Angle	Type	Length L1 / L2	Efficacy	Lumen	
LED F13T8/830/G/CC/600	13W	C.C.700mA	17 - 22V	3000K	280°	UL Type C	588mm / 602mm	135lm/W	1755lm	E
LED F13T8/840/G/CC/600	13W	C.C.700mA	17 - 22V	4000K	280°	UL Type C	588mm / 602mm	140lm/W	1820lm	E
LED F13T8/850/G/CC/600	13W	C.C.700mA	17 - 22V	5000K	280°	UL Type C	588mm / 602mm	140lm/W	1820lm	E
LED F13T8/865/G/CC/600	13W	C.C.700mA	17 - 22V	6500K	280°	UL Type C	588mm / 602mm	140lm/W	1820lm	E
LED F19T8/830/G/CC/900	19W	C.C.700mA	25 - 30V	3000K	280°	UL Type C	894mm / 906mm	135lm/W	2565lm	E
LED F19T8/840/G/CC/900	19W	C.C.700mA	25 - 30V	4000K	280°	UL Type C	894mm / 906mm	140lm/W	2660lm	E
LED F19T8/850/G/CC/900	19W	C.C.700mA	25 - 30V	5000K	280°	UL Type C	894mm / 906mm	140lm/W	2660lm	E
LED F19T8/865/G/CC/900	19W	C.C.700mA	25 - 30V	6500K	280°	UL Type C	894mm / 906mm	140lm/W	2660lm	E
LED F31T8/830/G/CC/1200	31W	C.C.1050mA	28 - 33V	3000K	280°	UL Type C	1198mm / 1212mm	135lm/W	4185lm	E
LED F31T8/840/G/CC/1200	31W	C.C.1050mA	28 - 33V	4000K	280°	UL Type C	1198mm / 1212mm	140lm/W	4340lm	E
LED F31T8/850/G/CC/1200	31W	C.C.1050mA	28 - 33V	5000K	280°	UL Type C	1198mm / 1212mm	140lm/W	4340lm	E
LED F31T8/865/G/CC/1200	31W	C.C.1050mA	28 - 33V	6500K	280°	UL Type C	1198mm / 1212mm	140lm/W	4340lm	E
LED F41T8/830/G/CC/1500	41W	C.C.1050mA	36 - 41V	3000K	280°	UL Type C	1500mm / 1513mm	135lm/W	5535lm	E
LED F41T8/840/G/CC/1500	41W	C.C.1050mA	36 - 41V	4000K	280°	UL Type C	1500mm / 1513mm	140lm/W	5740lm	E
LED F41T8/850/G/CC/1500	41W	C.C.1050mA	36 - 41V	5000K	280°	UL Type C	1500mm / 1513mm	140lm/W	5740lm	E
LED F41T8/865/G/CC/1500	41W	C.C.1050mA	36 - 41V	6500K	280°	UL Type C	1500mm / 1513mm	140lm/W	5740lm	E
LED F41T8/830/G/CC/1500/2	41W	C.C.1400mA	27 - 31V	3000K	280°	UL Type C	1500mm / 1513mm	135lm/W	5535lm	E
LED F41T8/840/G/CC/1500/2	41W	C.C.1400mA	27 - 31V	4000K	280°	UL Type C	1500mm / 1513mm	140lm/W	5740lm	E
LED F41T8/850/G/CC/1500/2	41W	C.C.1400mA	27 - 31V	5000K	280°	UL Type C	1500mm / 1513mm	140lm/W	5740lm	E
LED F41T8/865/G/CC/1500/2	41W	C.C.1400mA	27 - 31V	6500K	280°	UL Type C	1500mm / 1513mm	140lm/W	5740lm	E

Circuits

