




LED T8 UL Type A + B

Features

- Energy saving with low power consumption
- Perfect retrofit fluorescent T8 in Instant Start circuit
- For direct connection with AC
- Compatible with most common Instant Start electronic ballasts (Refer to the ballast compatibility list)
- Smooth operation even at low temperatures
- No mercury and hazardous substances
- Full glass body
- Voltage: 120Vac, 50/60Hz, Power Factor: 0.9
- Good color rendition, Ra ≥ 80

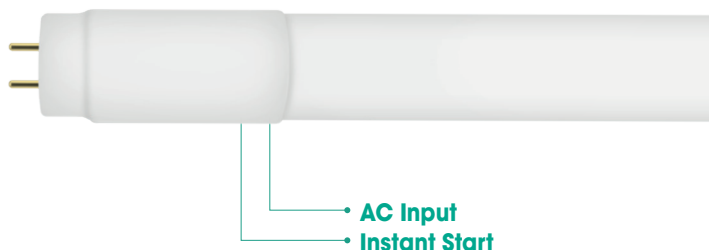

G13 base



Model	Voltage	Wattage	Color Temp	Beam Angle	Type	Length MOL	Efficacy	Lumen
LED F9T8/830/G/NA/ISAC/24	120 - 277V	9W	3000K	220°	UL Type A+B	23.7"	111lm/W	1000lm
LED F9T8/835/G/NA/ISAC/24	120 - 277V	9W	3500K	220°	UL Type A+B	23.7"	111lm/W	1000lm
LED F9T8/840/G/NA/ISAC/24	120 - 277V	9W	4000K	220°	UL Type A+B	23.7"	122lm/W	1170lm
LED F9T8/850/G/NA/ISAC/24	120 - 277V	9W	5000K	220°	UL Type A+B	23.7"	122lm/W	1170lm
LED F14T8/830/G/NA/ISAC/48	120 - 277V	14W	3000K	220°	UL Type A+B	47.7"	114lm/W	1600lm
LED F14T8/835/G/NA/ISAC/48	120 - 277V	14W	3500K	220°	UL Type A+B	47.7"	114lm/W	1600lm
LED F14T8/840/G/NA/ISAC/48	120 - 277V	14W	4000K	220°	UL Type A+B	47.7"	125lm/W	1800lm
LED F14T8/850/G/NA/ISAC/48	120 - 277V	14W	5000K	220°	UL Type A+B	47.7"	125lm/W	1800lm
LED F17T8/830/G/NA/ISAC/48	120 - 277V	17W	3000K	220°	UL Type A+B	47.7"	112lm/W	1900lm
LED F17T8/835/G/NA/ISAC/48	120 - 277V	17W	3500K	220°	UL Type A+B	47.7"	112lm/W	1900lm
LED F17T8/840/G/NA/ISAC/48	120 - 277V	17W	4000K	220°	UL Type A+B	47.7"	124lm/W	2200lm
LED F17T8/850/G/NA/ISAC/48	120 - 277V	17W	5000K	220°	UL Type A+B	47.7"	124lm/W	2200lm
LED F18T8/830/G/NA/ISAC/48	120 - 277V	18W	3000K	220°	UL Type A+B	47.7"	111lm/W	2000lm
LED F18T8/835/G/NA/ISAC/48	120 - 277V	18W	3500K	220°	UL Type A+B	47.7"	111lm/W	2000lm
LED F18T8/840/G/NA/ISAC/48	120 - 277V	18W	4000K	220°	UL Type A+B	47.7"	122lm/W	2300lm
LED F18T8/850/G/NA/ISAC/48	120 - 277V	18W	5000K	220°	UL Type A+B	47.7"	122lm/W	2300lm

UL Type A + B

