



LED Downlight ND271E - ND273E

Features

- 9W LED Downlight
- Adjustable tilting angle of $\pm 30^\circ$ vertically
- Recessed round, uniform distribution
- Twist-lock changeable LED module for inventory cost saving
- Ideal replacement up to 100W halogen downlight
- Good color rendition, $R_a \geq 80$ / 90

Materials / Finish

- Body: Die cast aluminium
- Trim: Die cast aluminium
- Reflector: High purity, anodized aluminium

Installation / Mounting

- Quick installation with mounting bracket
- Suitable for recessed mount
- Remote gear unit allows flexible and easy installation
- Cut out dimensions $\varnothing 75\text{mm}$ / $\varnothing 95\text{mm}$

Standards

- Designed and manufactured to comply with international standard EN60598
- Class II Electrical
- IP 20

Dimming Options




ND271E (Adjustable)



ND272E (Adjustable)



ND273E (Adjustable)

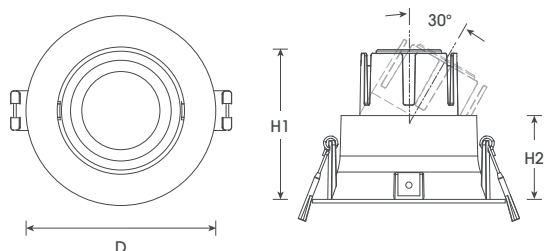

(Unit : mm)	(D)	(H1)	(H2)	Cut Out Dimensions
ND271E	$\varnothing 85$	x 54	x 17	$\varnothing 75$
ND272E	$\varnothing 104$	x 72	x 35	$\varnothing 95$
ND273E	$\varnothing 108$	x 86	x 49	$\varnothing 95$



Model	Luminaire Wattage	Driver	Color Temp	Beam Angle	Luminaire Lumen	ENERGY STAR
ND271E-9W/830	9W	C.C. 200mA	3000K	20° / 30° / 38° / 50°	740lm	F
ND271E-9W/840	9W	C.C. 200mA	4000K	20° / 30° / 38° / 50°	805lm	F
ND271E-9W/865	9W	C.C. 200mA	6500K	20° / 30° / 38° / 50°	890lm	E
ND272E-9W/830	9W	C.C. 200mA	3000K	20° / 30° / 38° / 50°	740lm	F
ND272E-9W/840	9W	C.C. 200mA	4000K	20° / 30° / 38° / 50°	805lm	F
ND272E-9W/865	9W	C.C. 200mA	6500K	20° / 30° / 38° / 50°	890lm	E
ND273E-9W/830	9W	C.C. 200mA	3000K	20° / 30° / 38° / 50°	740lm	F
ND273E-9W/840	9W	C.C. 200mA	4000K	20° / 30° / 38° / 50°	805lm	F
ND273E-9W/865	9W	C.C. 200mA	6500K	20° / 30° / 38° / 50°	890lm	E