



## LED Seamless T5 Batten

### Features

- Energy saving with low power consumption
- Low thermal output with no IR and harmful UV
- No mercury and hazardous substances
- Seamless design
- Good color rendition, Ra ≥80

### Materials / Finish

- Body: White PC
- Diffuser: Opal
- End Cap: Plastic

### Installation / Mounting


- Quick installation with two mounting clips
- Linear plug and play connection at both ends

### Standards

- Designed and manufactured to comply with international standard EN60598
- Class II Electrical
- IP 20




Seamless design




Optional Switch

### Accessories

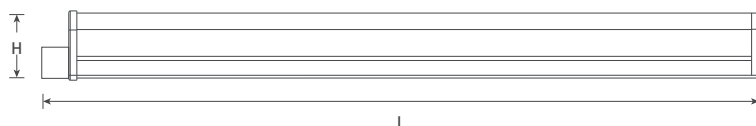

(Unit : mm)	(L)	(W)	(H)	Max. no. of luminaires interconnected
NL191A	308 x	22.5 x	36	30
NL192A	582 x	22.5 x	36	15
NL193A	882 x	22.5 x	36	10
NL194A	1182 x	22.5 x	36	8



Model	Voltage	Luminaire Wattage	Color Temp	Beam Angle	Luminaire Lumen	
NL191A-5W/830	220 - 240V	5W	3000K	130°	430lm	F
NL191A-5W/840	220 - 240V	5W	4000K	130°	460lm	F
NL191A-5W/865	220 - 240V	5W	6500K	130°	500lm	F
NL192A-9W/830	220 - 240V	9W	3000K	130°	800lm	F
NL192A-9W/840	220 - 240V	9W	4000K	130°	850lm	F
NL192A-9W/865	220 - 240V	9W	6500K	130°	900lm	F
NL193A-14W/830	220 - 240V	14W	3000K	130°	1400lm	F
NL193A-14W/840	220 - 240V	14W	4000K	130°	1450lm	F
NL193A-14W/865	220 - 240V	14W	6500K	130°	1500lm	F
NL194A-18W/830	220 - 240V	18W	3000K	130°	1800lm	F
NL194A-18W/840	220 - 240V	18W	4000K	130°	1850lm	F
NL194A-18W/865	220 - 240V	18W	6500K	130°	1900lm	F