



## LED Spotlight NS171E - NS172E

### Features

- 40W / 55W LED Spotlight
- Adjustable tilting angle of 0°-80° vertically and 350° horizontally
- Ideal replacement for HID lighting fixtures up to 70W
- Dimmable as option
- Good color rendition, Ra ≥80

### Materials / Finish

- Body: Die cast aluminium
- Reflector: Anodised faceted aluminium
- Diffuser: Toughened glass

### Installation / Mounting

- Quick recessed installation with two spring clips
- Suitable for ceiling thickness between 5 and 15mm
- Remote gear unit allows flexible and easy installation
- Cut out dimensions 225x135mm

### Standards


- Designed and manufactured to comply international standard EN60598
- Class II Electrical
- IP 20



NS171E



NS172E

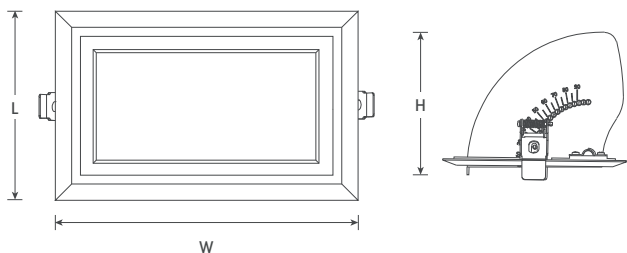

(Unit : mm)	(L)	(W)	(H)	Cut Out Dimensions
NS171E	150 x	240 x	107	225 x 135
NS172E	150 x	240 x	107	225 x 135

Model	Luminaire Wattage	Driver	Color Temp	Beam Angle	Luminaire Lumen	ENERGY*
NS171E-40W/830	40W	C.C. 900mA	3000K	60°	3685lm	F
NS171E-40W/840	40W	C.C. 900mA	4000K	60°	3785lm	F
NS171E-40W/865	40W	C.C. 900mA	6500K	60°	3880lm	F
NS172E-55W/830	55W	C.C. 1300mA	3000K	60°	5725lm	E
NS172E-55W/840	55W	C.C. 1300mA	4000K	60°	5820lm	E
NS172E-55W/865	55W	C.C. 1300mA	6500K	60°	5920lm	E

