


LED Floodlight UF121E - UF126E



Features

- 10W / 30W / 50W / 100W / 200W / 300W LED Floodlight
- Polyester powder finish for excellent corrosion and UV resistance
- Designed for excellent thermal transfer to extend component life
- Uniform design with six construction sizes
- Good heat dissipation performance
- Good color rendition, Ra ≥ 80

Materials / Finish

- Body: Sturdy die cast aluminium housing with anodised steel bracket and extruded silicone rubber gasket
- Diffuser: Toughened glass
- Choice of White and Black color

Installation / Mounting

- Suitable for mast mounting and wall mounting

Standards




- Designed and manufactured to comply international standard EN60598
- Class I Electrical
- IP 65




EUROPE



OUTDOOR LUMINAIRE

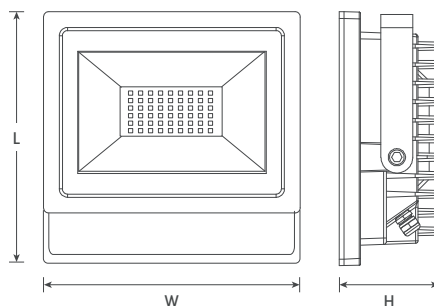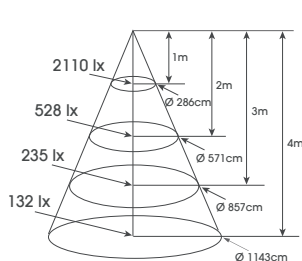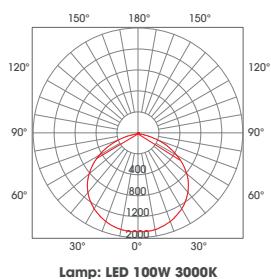

(Unit : mm)	(L)	(W)	(H)
UF121E	84 x	103 x	21.5
UF122E	122 x	159.5 x	26
UF123E	159.5 x	205.5 x	33
UF124E	210 x	270 x	33
UF125E	280 x	380 x	36
UF126E	335 x	445 x	45



Model	Voltage	Luminaire Wattage	Color Temp	Beam Angle	Luminaire Lumen	
UF121E-10W/830	180 - 265V	10W	3000K	110°	750lm	G
UF121E-10W/840	180 - 265V	10W	4000K	110°	800lm	F
UF121E-10W/865	180 - 265V	10W	6500K	110°	850lm	F
UF122E-30W/830	180 - 265V	30W	3000K	110°	2475lm	F
UF122E-30W/840	180 - 265V	30W	4000K	110°	2525lm	F
UF122E-30W/865	180 - 265V	30W	6500K	110°	2580lm	F
UF123E-50W/830	180 - 265V	50W	3000K	110°	4210lm	F
UF123E-50W/840	180 - 265V	50W	4000K	110°	4315lm	F
UF123E-50W/865	180 - 265V	50W	6500K	110°	4420lm	F
UF124E-100W/830	180 - 265V	100W	3000K	110°	8580lm	F
UF124E-100W/840	180 - 265V	100W	4000K	110°	8685lm	F
UF124E-100W/865	180 - 265V	100W	6500K	110°	8790lm	F
UF125E-200W/830	180 - 265V	200W	3000K	110°	17370lm	F
UF125E-200W/840	180 - 265V	200W	4000K	110°	17685lm	F
UF125E-200W/865	180 - 265V	200W	6500K	110°	18105lm	F
UF126E-300W/830	180 - 265V	300W	3000K	110°	26105lm	F
UF126E-300W/840	180 - 265V	300W	4000K	110°	26315lm	F
UF126E-300W/865	180 - 265V	300W	6500K	110°	26525lm	F