

LED 灯带 2016 Super Slim 北美

7.2W/m, 14.4W/m



图表

LED驱动控制器:



**12V/24V
LED Driver**



**LED Dimmer
(With Remote
Control Device)**



**LED Manual
Controller**




**LED Remote
Controller**

佑昌灯光器材有限公司

电话: (852) 2511 0022 传真: (852) 2511 0082 网址: www.prosperitylamps.com 电子邮件: info@prosperitylamps.com

©2024 佑昌灯光器材有限公司 保留所有权利

铝槽:



Surface mounted

* Extra profiles and accessories need to order separately.

连接器:



2 Pin Quick Connector



Strip-to-Wire



Strip-to-Strip



'I' Type Fast Plug




'T' Type Fast Plug




Wire-to-Wire Fast Plug

尺寸:



IP20

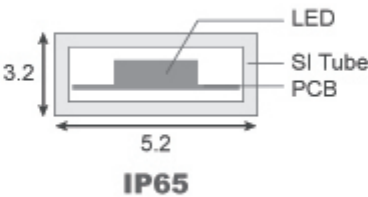

IP65



IP67-R

标准



应用



技术参数	
电参数	
额定功率 [W]	7.2W/m, 14.4W/m
额定电压 [V/Hz]	100–277V, 50/60Hz
功率因数 @120V	0.95
输入电流 [mA] @120V	63 / 126
LED	
产品型号	
LED 2016 7.2W 3.5–60 9XX	7.2W/m, 12V/24VDC
LED 2016 14.4W 3.5–120 9XX	14.4W/m, 24VDC
光通量 [lm]	
7.2W/m	600lm/m @3000K
	615lm/m @4000K
	630lm/m @6500K
14.4W/m	1200lm/m @3000K
	1230lm/m @4000K
	1260lm/m @6500K
剪断位置 [mm]	
7.2W/m	50mm/3LEDs (12V), 100mm/6LEDs (24V)
14.4W/m	50mm/6LEDs (24V)
光效性能	
色容差	<6
预计每年能源支出 [\$USD]	0.87/m / 1.73/m
光效 [lm/W]	83–88
显色指数 [Ra]	≥90
色效维持 [hr]	>6000
光度分布 [°]	120
寿命 [yrs] (每日使用3小时)	27
6000小时后, 光通维持率	>0.8
开关测试	>15,000 cycles
启动时间 [S]	<0.5
LED 失效率	<5%
尺寸和物料	

长度 L [mm]	5000 per reel
宽度 W [mm] x 高度 H [mm]	IP20 : 3.5 x 1
	IP65 : 5.2 x 3.2
	IP67-R : 5.5 x 3.5
	Surface mounted profile : 7.8 x 9
LED数目	60 pcs/m (7.2W/m)
	120 pcs/m (14.4W/m)
物料	Chips: Epistar
标准	
ANSI	UL8750, UL1993, UL1598, C82.77-2002, C78.377-2008
汞含量 [mg]	0.0
其他	
调光 [Y/N]	Optional
工作温度	-10° C ~ 40° C
存储温度	-20° C ~ 60° C